

# Storm Window

## Magnetic Tape with Foam Adhesive & Steel Tape with Foam Adhesive


### SUPERIOR MAGNETIC QUALITY

MagTech's own in-house recipe is formulated to have greater magnetic strength and better flexibility than the competition. Custom profiles are manufactured with high-quality raw materials, using a unique state-of-the-art magnetization process that provides superior holding power.

Compound, adhesive and magnetization options are available for customization of a wide variety of applications.

### APPLICATIONS:

Door Edge Sealing for Storm  
Windows and Doors, Sauna Rooms,  
Shower Rooms, Door Curtain,  
Window Wire Mesh, Insect Screen,  
Blinds, Office and Warehouse  
Labeling, Advertising, Refrigeration  
Gaskets and more!

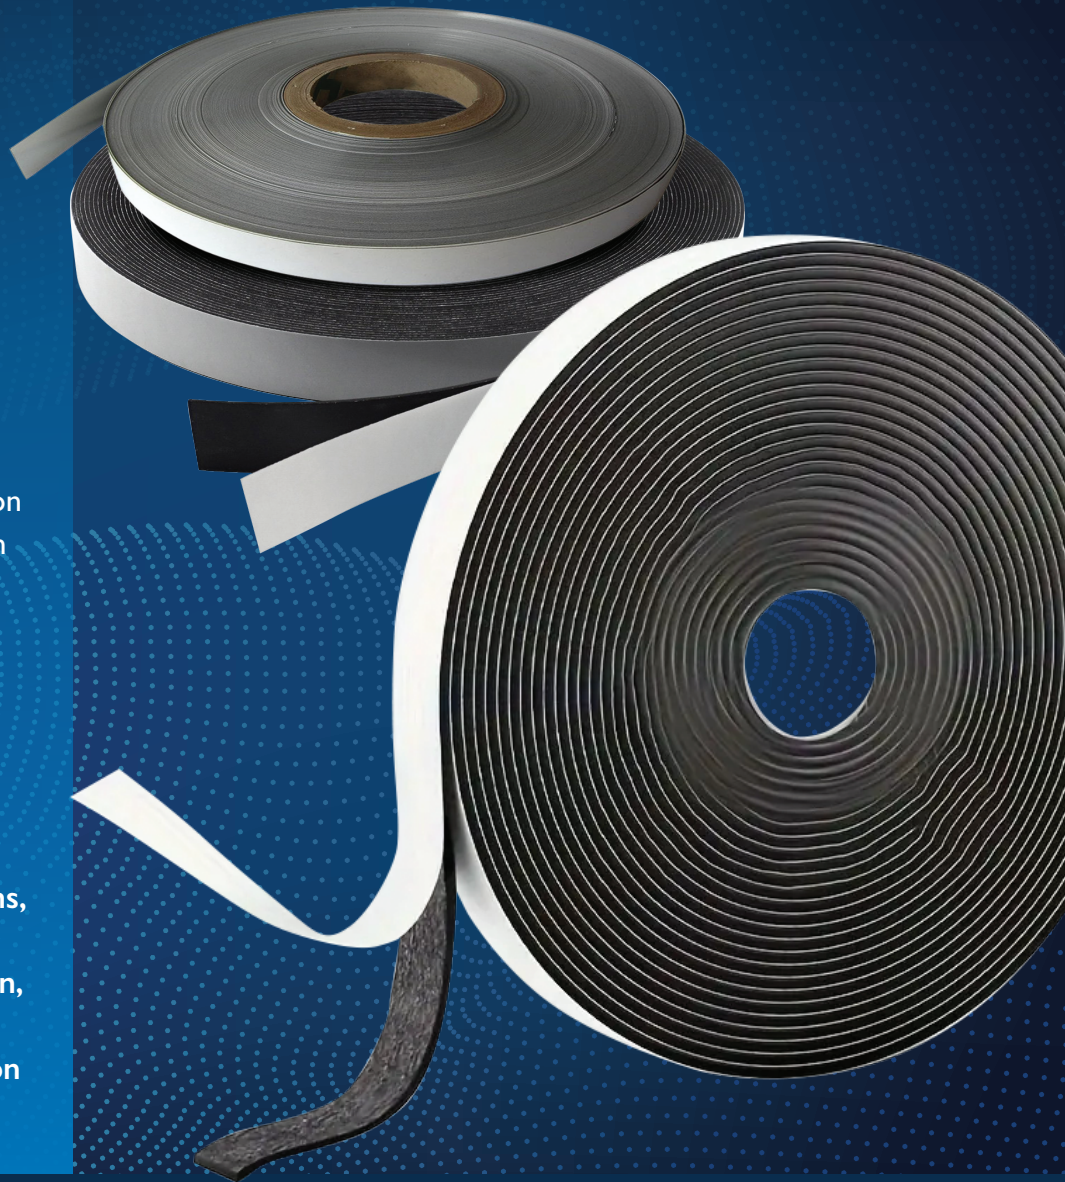

Contact us for recommendations for your product's application.

### Magnet Technology

Toll Free: **800.729.0791** • Phone: **513.932.4416**

Fax: **513.932.4502**

E-mail: **info@magtech.cc**



# Storm Window

## Magnetic Tape with Foam Adhesive & Steel Tape with Foam Adhesive

### SPECIFICATIONS

#### Standard Strip Product Line

**Standard Thickness of .060"** (1.52mm)  
also available in .060" to .375" (.76 mm to 6.35mm)

**Standard Width of .50"** (1.27mm)  
also available in 0.25" to 3" (6.35mm to 76.2mm)

Custom profiles are available upon request.

Formulated to have greater magnetic strength and more flexibility than other thermoplastic materials of comparable flexibility. Magnet strips have custom ID grooves for easy installation. Available in standard and high-energy. Allow us to customize your project.

#### Adhesives

We use high-quality outdoor acrylic foam adhesive. Should your application require a special adhesive system, custom options are available.

Contact us for technical assistance with your project.



Thickness	Pole Spacing	Magnetic Pull*
.060" x 0.50" 1.52mm x 12.7mm	0.125" PPI	10.8# (63 g)
*Minimum pounds pull per lineal foot of 1" (25.4 mm) wide at zero air gap (grams pull per square centimeter standard energy).		

**We design and build all our own magnetizing fixtures and magnetizers.**

#### WEATHERABILITY

Possesses great stability in all environments up to 175° F. Excellent aging properties during factory storage. Resists light, ozone and corrosion.

#### SHIPPING AND PACKAGING

MagTech works directly with trucking companies to ship your product using the most economical shipping method possible. We can package in rolls, bulk on skids, cut blanks in boxes or use personalized packaging for private labeling. Most orders ship within 24 hours. Custom orders have industry-leading lead times.

#### CUSTOMER SERVICE

We pride ourselves on excellent customer service. We offer genuine, customer-oriented solutions that beat the competition. Rely on MagTech for expert service, convertibility and speed.